


Installing License Patrol Mac Client Using Apple Remote Desktop (ARD)

Installation of Mac client comprises two parts.

Part 1. Preparing configuration file

License Patrol Client daemon will use configuration file config.plist file to import settings during installation and configuration. Follow below steps to create configuration file.

1. Open ARD window.
2. Select target client stations. Client stations must be online.
3. Click on UNIX icon.

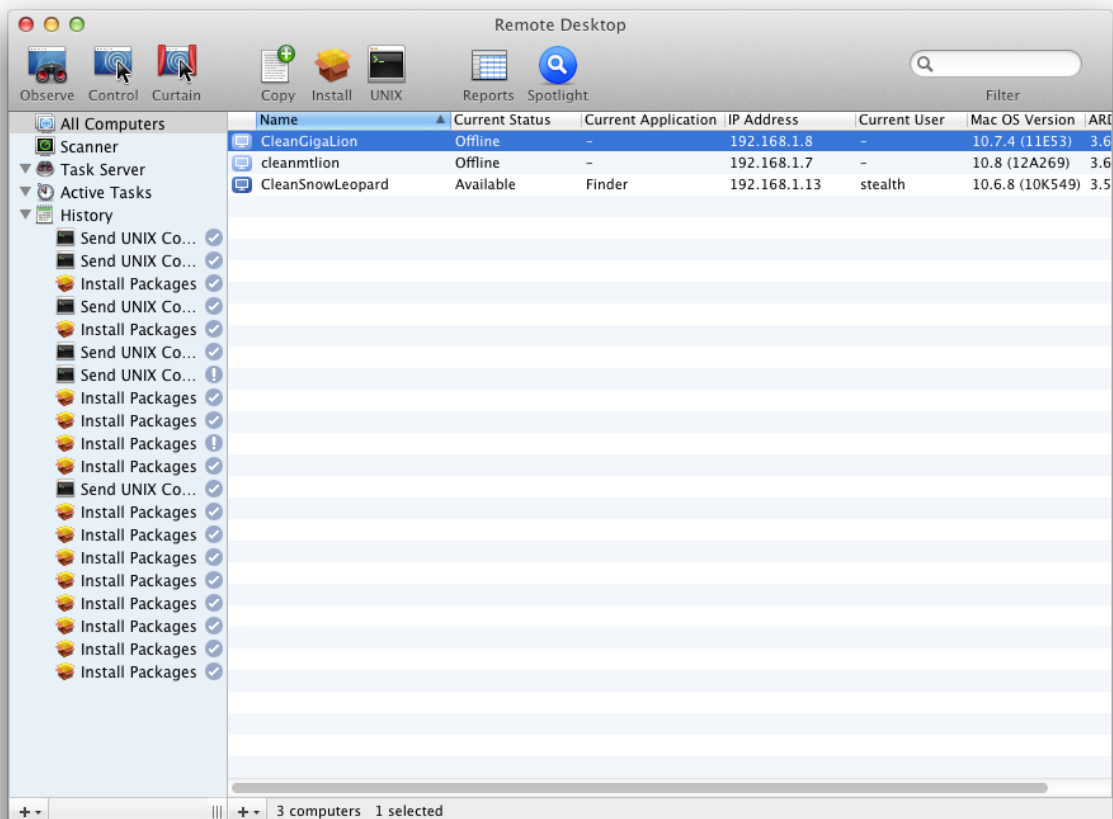


4. Paste below script into open window:

```
mkdir -p /Library/Application\ Support/License\ Patrol
rm -f /Library/Application\ Support/License\ Patrol/config.plist
/usr/libexec/plistbuddy -c 'Add serverip string "192.168.1.2"'
/Library/Application\ Support/License\ Patrol/config.plist
/usr/libexec/plistbuddy -c 'Add serverpassword string "welcome"'
/Library/Application\ Support/License\ Patrol/config.plist
```

You need to change server IP and server password (default is “welcome”) to match your environment.

Script can be saved by clicking on **Template** and selecting **Save as Template**.


Important: The script must be executed as **root** user. This will create client folder with **root** permissions and prevent deleting folder from License Patrol clients by non-administrators.

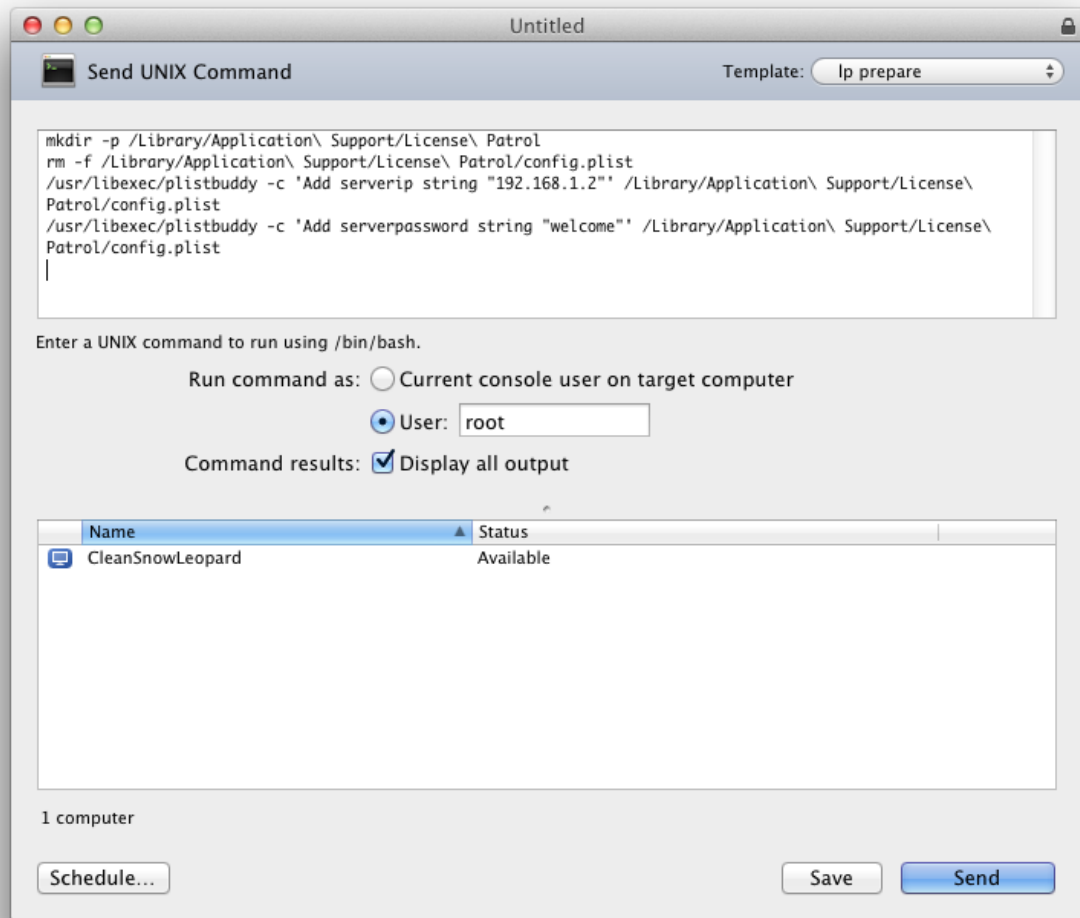

Part 2. Deploying License Patrol Client

Follow below steps to deploy License Patrol Client to target Mac clients.

1. Download and mount LicensePatrolClient.dmg file. File can be downloaded from Downloads page at www.veralab.com.
2. Open ARD window and select target client stations.
3. Click Install.
4. Click on "+" icon and add installer from License Patrol image file.
5. Click Install button.

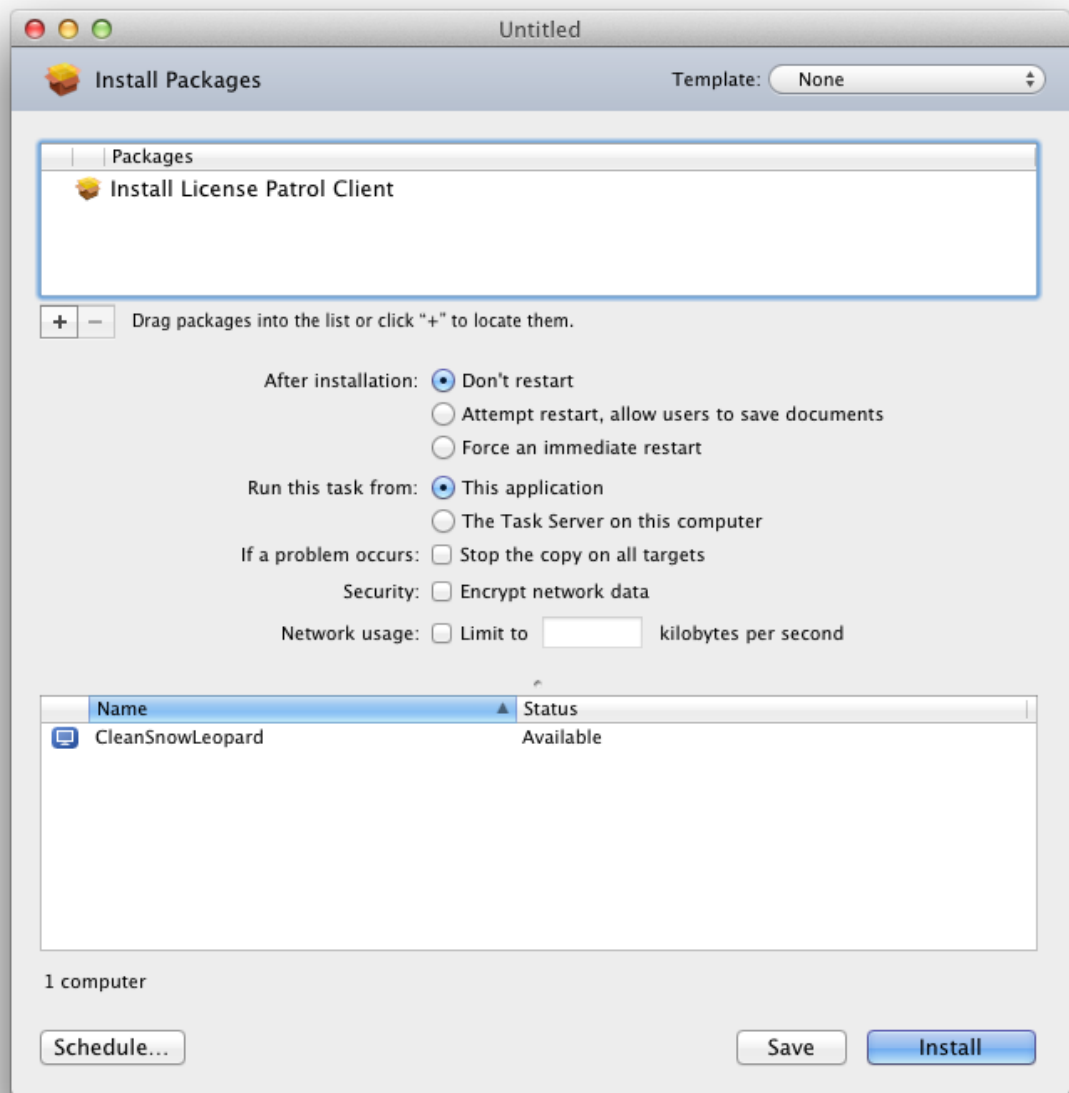

ARD will automatically deploy License Patrol image to target client stations and execute installer.